


# iW-RainboW-G20M - RZ/G1M/G1N Qseven SOM Block Diagram

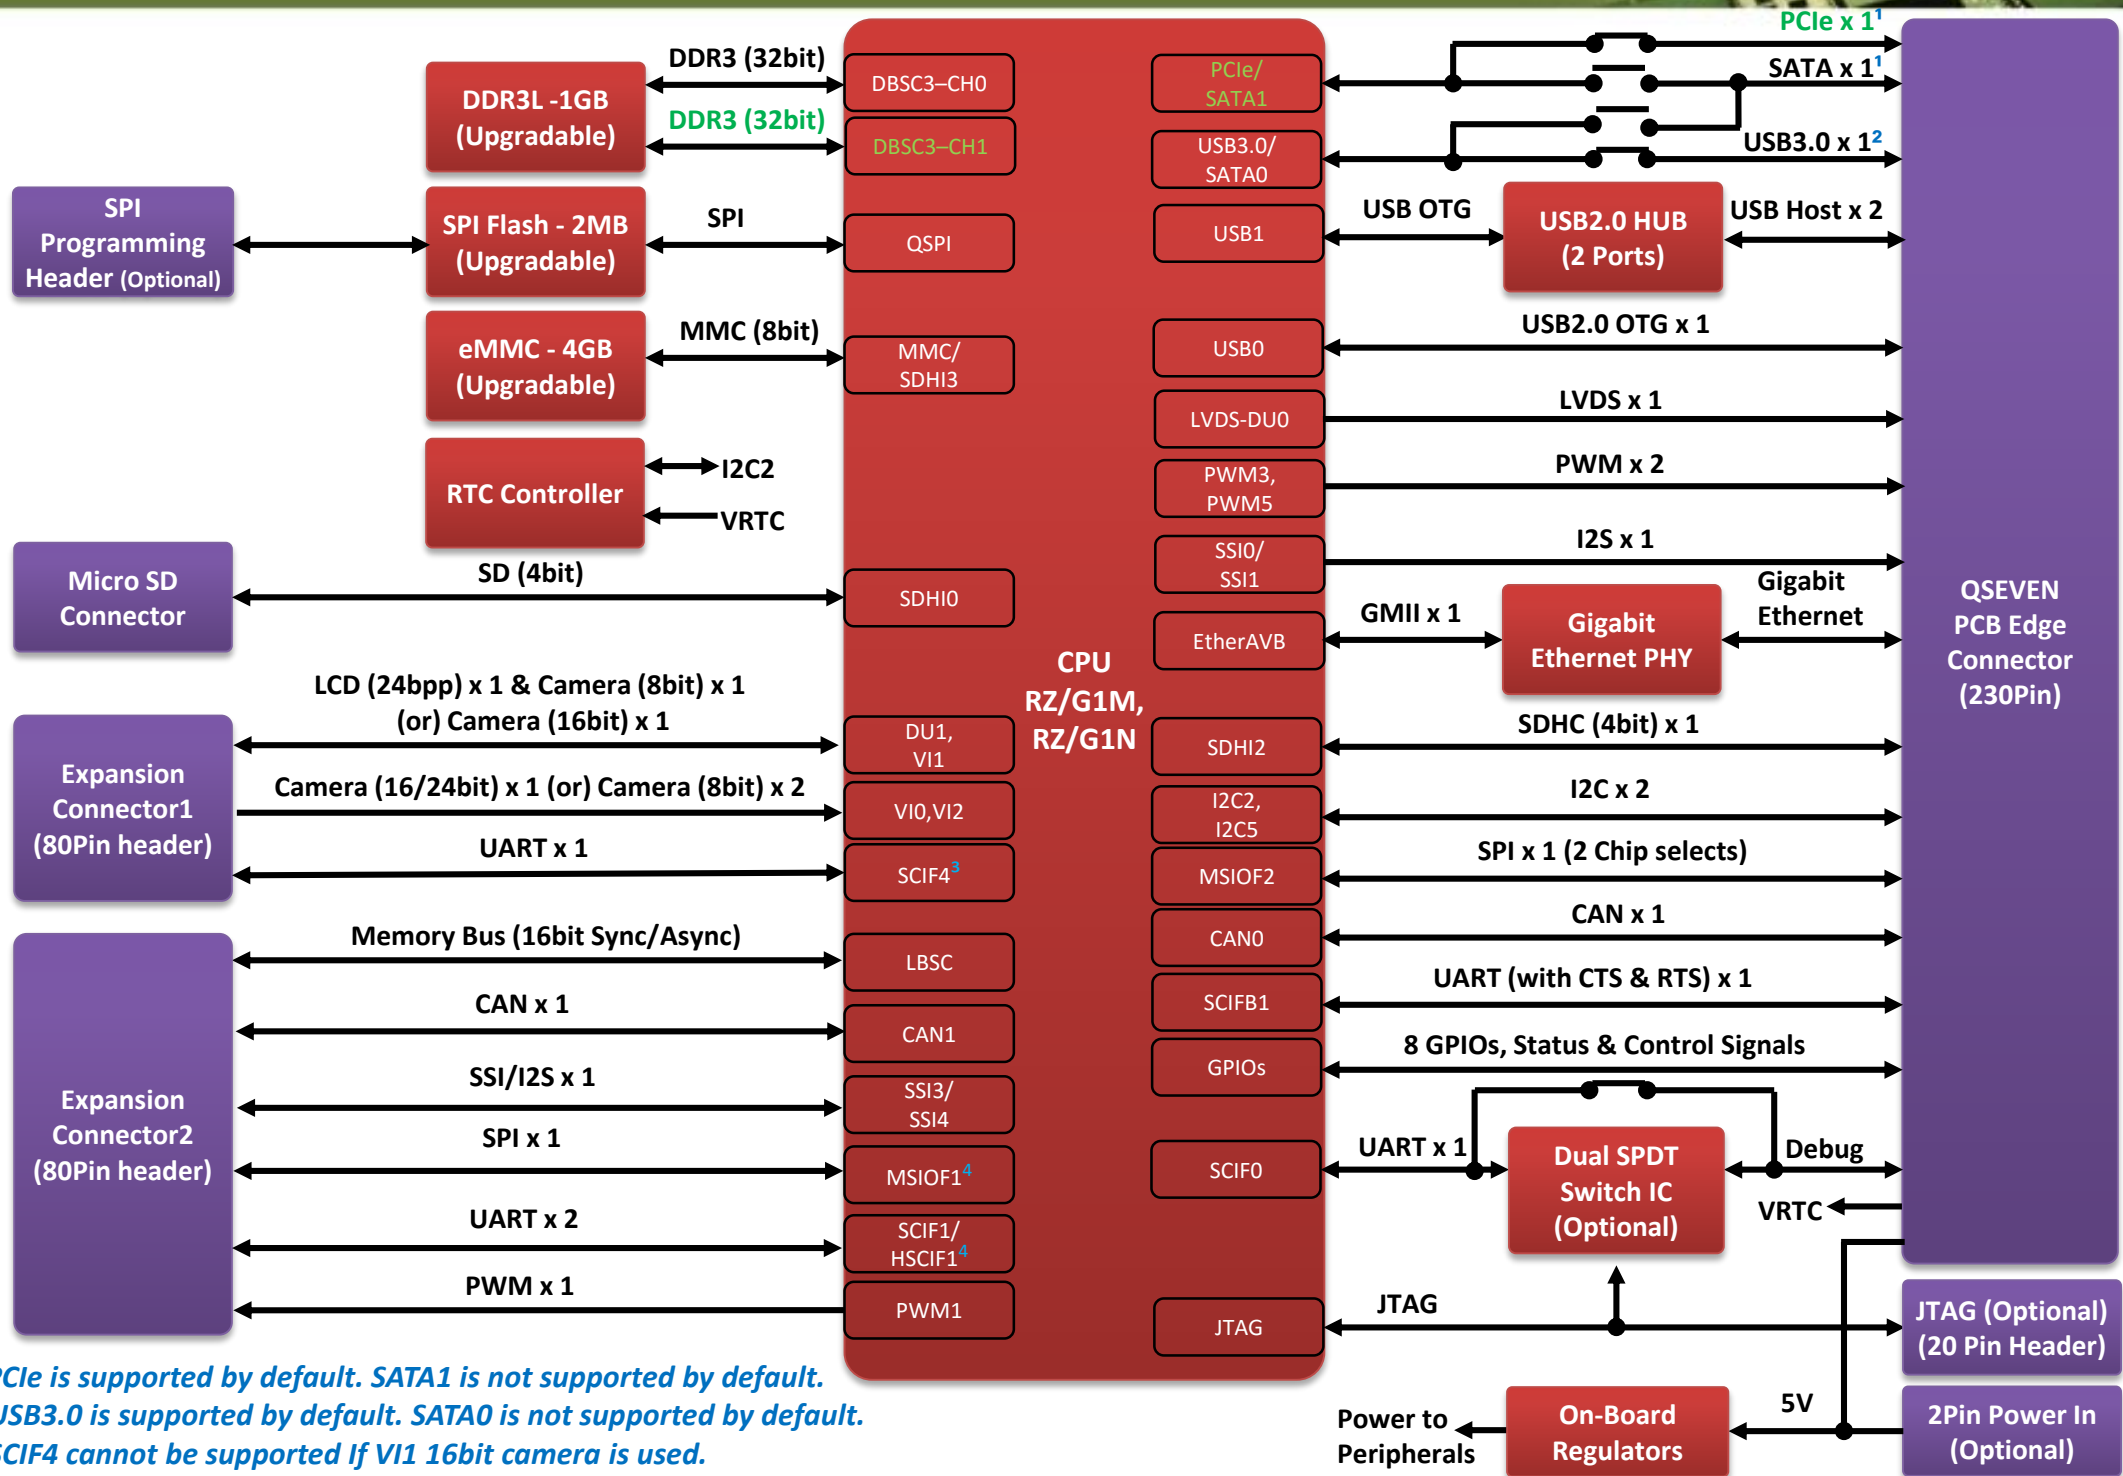

<sup>1</sup> PCIe is supported by default. SATA1 is not supported by default.

<sup>2</sup> USB3.0 is supported by default. SATA0 is not supported by default.

<sup>3</sup> SCIF4 cannot be supported if VI1 16bit camera is used.

<sup>4</sup> HSCIF1's flow control signals and MSIOF1 are multiplexed and either one only can be used at a time.

**Note: Green Font blocks are not supported in RZ/G1N CPU**